


Tillat Sattar

C42892

. 03-31-06

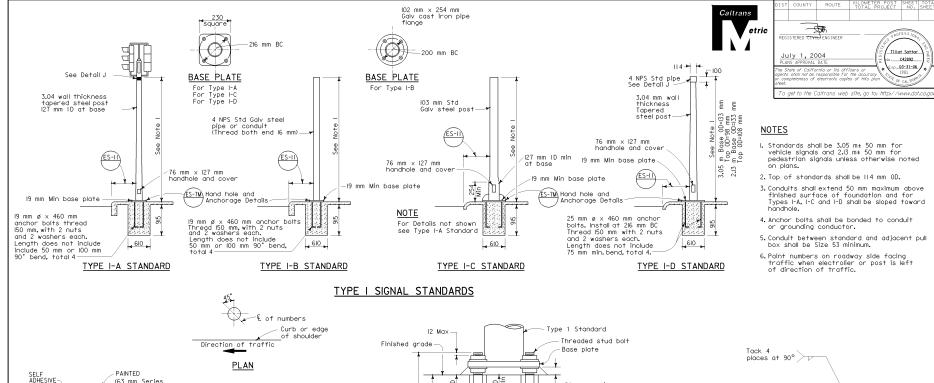

Embedment as standard t

ANCHOR BOLTS WITH SLEEVE NUTS Sleeve nuts to be used only when shown

or specified on Project Plans

Min

See Note 6

Curb or shoulder grade 50 ± mm Min 75 mm Max

Screw up for

tight connection

Sleeve nut same Dia and strenath as

regular nut

4 Ġ N

(63 mm Series

Roadway

LOCATION OF EQUIPMENT NUMBERS

ON STANDARDS AND POSTS

side of pole

TYPICAL NUMBER FORMAT

"D" letters)


25 mm

25 mm

25 mm

25 mm

NUMBER DETAIL



Tube may be inserted into pipe or butted as required

STATE OF CALIFORNIA DEPARTMENT OF TRANSPORTATION

ELECTRICAL SYSTEM (SIGNAL AND LIGHTING STANDARDS TYPE 1 STANDARDS AND **EQUIPMENT NUMBERING)**

NO SCALE

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SHOWN

ES-7B